

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Key Features & Benefits:

- Universal AC Input / Full Range (up to 305 VAC)
- Built-in Active PFC Function
- Protections: Short Circuit / Over Voltage / Over Temperature
- Suitable for Dry / Damp Locations
- Easy Installation with ESL Vision Quick Connect Series
- Potted for Better Cooling and Vibration Resistance
- 7 Year Warranty



Technical Specifications:

Input

Input Voltage: 100 - 277 VAC
 Power Factor: 0.99 / 120 VAC, 0.93 / 277 VAC
 Total Harmonic Distortion: 15%
 Frequency Range: 47~63 Hz
 Efficiency: 88%
 AC Current: .37A / 120 VAC, .16A / 277 VAC


Output

DC Voltage: 72 VDC
 Rated Current: 440 mA
 Rated Power: 22W x 2 (Total 44W)
 Voltage Range: 35 - 75 VDC
 Line Regulation: 3%
 Load Regulation: 2%

Environment

Working Temperature: -20 ~ 50°C
 Max Case Temperature: 84°C
 Working Humidity: 20 -90% RH

Driver Dimensions:

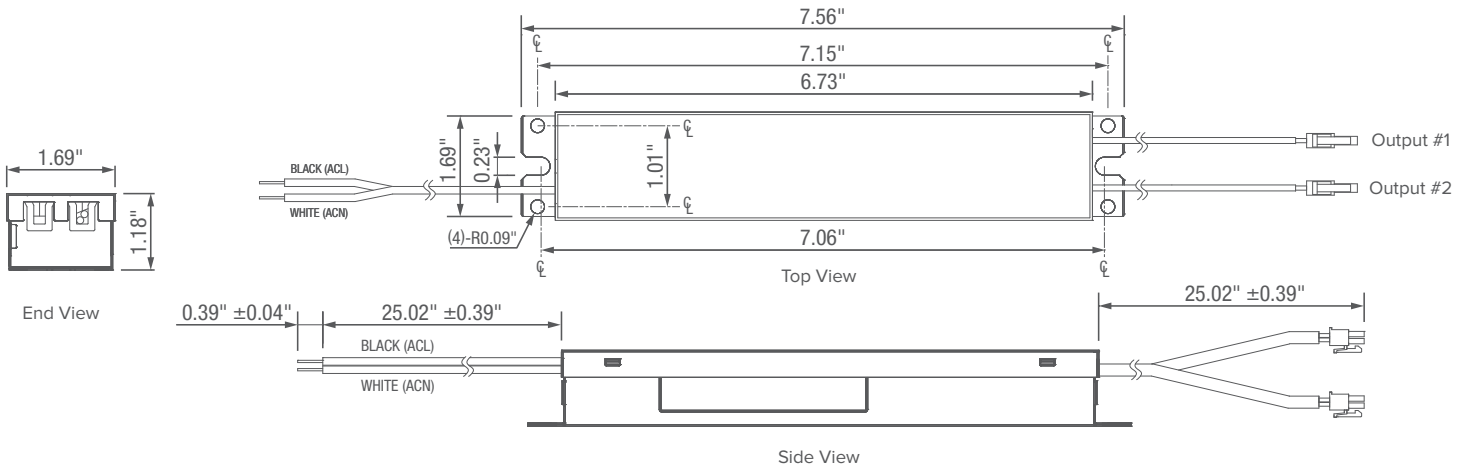

Example Part Number: **ESL-DQC3-22W-2L**

