

Project: _____ Date: _____

Catalog #: _____

Notes: _____

Key Features & Benefits:


- Easy Installation
- Universal Input Voltage
- 25 Watt LED at 170 VDC (Equivalent 120 VAC)
- UL Recognized
- 90 Min. Illumination Time
- 24 Hour Recharge Time
- Compact Integrated Design
- Battery:
 - High-Temperature
 - Maintenance Free
 - Nickel-Cadmium Battery
 - 7-10 Year Life Expectancy
- 3 Year Warranty
- Test Switch and Charge Indicator Kit




Technical Specifications:

- Input Power: 6 Watts
- Input Voltage: 120 -277 VAC
- Input Current @ 120V: .05 mA
- Input Current @ 277V: 21 mA
- Output Power: 25 Watts (max)
- Output Voltage: 170 VDC
- Max connected Load: 1.04A
- Temperature Rating: Not to exceed 50°C/122°F
- Emergency Operation: ≥90 Minutes

Emergency Driver Dimensions:

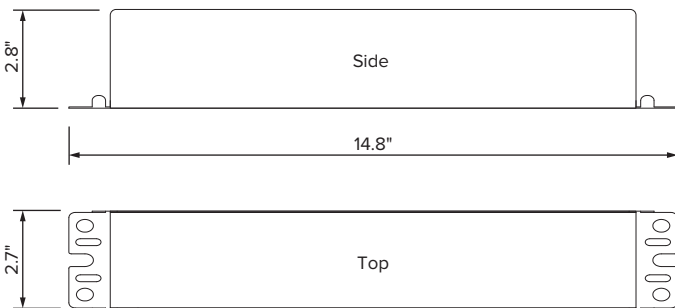

Typical Wiring Diagram:

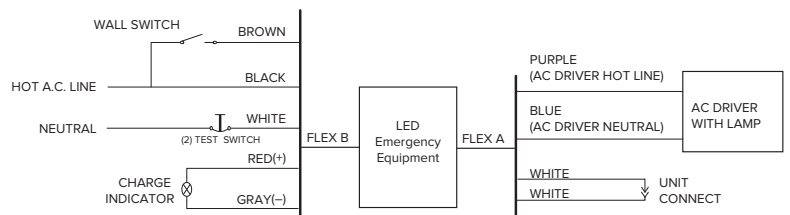

(1) Do not mate connector until installation is complete and AC power is supplied.

Ordering Guide:

Example Part Number: **ESL-EMG-AC-25W**

