

LED Wall Pack - 75W

Project: _____ Date: _____

Catalog #: _____

Notes: _____

The ESL Vision Quick Connect series The ESL Vision Wall Pack Series features classic form with the modern energy saving benefits of LED. Switching your businesses' outdoor lighting to ESL Vision's Wall Packs will not only cut your energy expenses by up to 75%, it'll also save you on those costly facility maintenance visits.

Key Features & Benefits

- Rugged cast aluminum housing:
 - Dark bronze finish
- Optical grade polycarbonate lens:
 - No UV/IR light
 - Uniform light distribution
 - Impact resistant
- 5 year warranty
- One piece light source and lens with easy access driver
- Continuous gasket for weathertight seal
- (3) 3/4" threaded knockouts
- Environmentally friendly:
 - No mercury
 - No hazardous substances
 - Reduced energy
- DLC listed reflector
 - Low light pollution
- L70 Lifetime >50,000 Hours
- 95° beam angle
- CRI ≥83



Wall Pack



DLC Listed Reflector



Front



Technical Data



Driver Specifications

Input Voltage: 100-277VAC
Input Frequency: 50/60Hz
Input Power: 75W
Input Current @ 120V: 0.625A (75W)
Input Current @ 277V: 0.271A (75W)
Ambient Operating Temperature: -4°F to 113°F (-20°C to 45°C)
Power Factor: >0.90
THD: <20%

Light Specifications

Lumen Output:
 5,475 lumens @ 4000K
 6,020 lumens @ 5000K
Lumens per Watt: Up to 80
Correlated Color Temperature (CCT): 4000k, 5000k
Color Rendering Index (CRI): ≥84

Wall Pack Dimensions

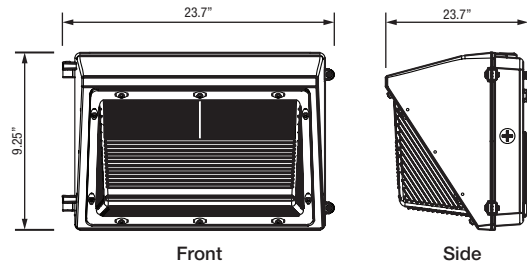

Back

Wall Pack Ordering Guide

ESL	-	WP	-	75W	-	1	
ESL	-	WP	-	Watts	-	Series	Color
		WP (Wall Pack)		75W (75 Watts)		1 (Series 1)	40 (4000 Kelvin) 50 (5000 Kelvin)

Example Part Number: ESL-WP-75W-140