

**Key Features & Benefits:**

- Installation
  - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
  - Acceptable for use in IC or Non-IC applications
  - Damp location listed
  - Energy Star listed
- Construction
  - Recessed bevel with frosted lens for smooth, even and optimal light distribution
  - Cast aluminum housing and trim
- Rated life > 50,000 hrs

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



**9 LIGHTS  
IN ONE**



**IC RATED**



**KELVIN ADJUSTABLE**





**WATTAGE ADJUSTABLE**



**8" OPTUS — 12 WATTS — 20 WATTS — 30 WATTS**

**Technical Specifications:**

- Power: 12/20/30 Watts
- Lumens: Up to 2,300 Lumens
- Input Voltage: 110-277 VAC
- Power Factor: >0.98
- CRI: 90
- Kelvin: 3000K, 4000K, 5000K
- Input Frequency: 50/60Hz
- Operating Temperature: -13°F to 114°F (-25°C to 45°C)
- Max Mounting Thickness: 5"

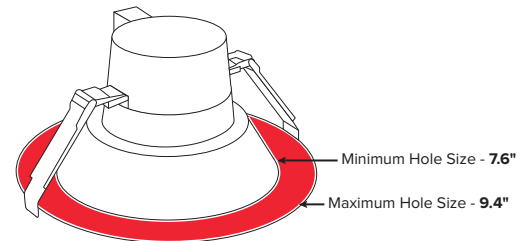

**Catalog Data:**

ITEM#	WATTS	KELVIN			CRI	ENERGY STAR CERTIFIED
		3000K	4000K	5000K		
ESL-OPT-8-xW-1yy	12W	900	1,000	1,050	90	✓
	20W	1,500	1,600	1,650	90	✓
	30W	2,100	2,250	2,300	90	✓

LUMEN OUTPUT

**Ordering Guide:**

