

Key Features & Benefits:

- Installation
 - All in one junction box enables extremely quick installation
 - Can accept BX cable (metal clad wiring) or NM (Romex) wiring
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - Wet location rated
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
 - 90+ CRI
- Electrical
 - Dimmable to 10% (120V) Triac
 - 120-277 VAC
 - Rated life > 50,000 hrs
- Options
 - 4, 5/6, and 8 inch can replacements available
 - Round and square trim kits available
 - External emergency back-up available (ESL-EMG-1AC-25W)



Project: _____


Date: _____

Catalog #: _____

Notes: _____



IC RATED

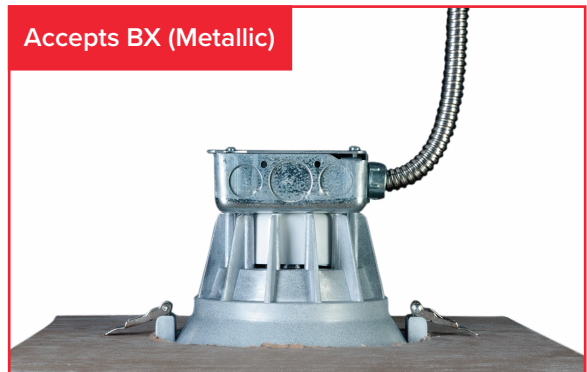

Technical Specifications:

- Power: 25 Watts
- Lumens: Up to 1,800 Lumens
- Input Voltage: 120-277 VAC
- Power Factor: >0.98
- CRI: 90+
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Input Frequency: 50/60Hz
- Operating Temperature: -13°F to 114°F (-25°C to 45°C)
- Control: Triac dimmable at 120V to 10%
- Max Mounting Thickness: 2.5"




Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	CRI	ENERGY STAR CERTIFIED
ESL-CCR-R8-25W-130	25W	1,700	68	3000K	90+	✓
ESL-CCR-R8-25W-135	25W	1,700	68	3500K	90+	✓
ESL-CCR-R8-25W-140	25W	1,740	69	4000K	90+	✓
ESL-CCR-R8-25W-150	25W	1,800	72	5000K	90+	✓

Ordering Guide:

Example Part Number: ESL-CCR-R8-10W-130

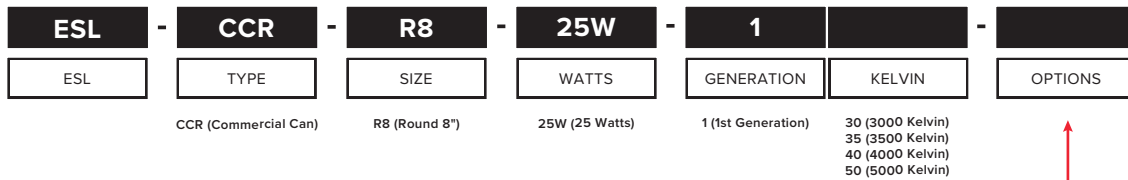

Options (Add as Suffix):

ESL-EMG-1AC-25W

External Emergency Back-up

Dimensions:

